




Nº de Ref. : 240A

Base semiempotrable

rectas

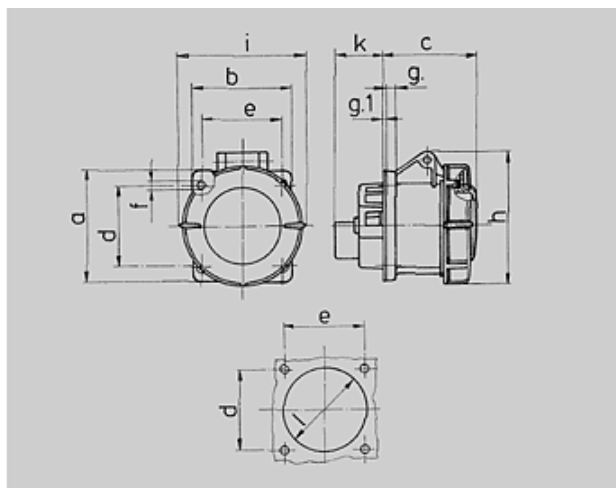

Plano	Amp.	16			32		
1 MB 141	Polos	3	4	5	3	4	5
Dim. en mm	a	75	75	75	85	85	85
	b	75	75	75	75	75	75
	c	60	61	61	70	70	72
	d	60	60	60	60	60	60
	e	60	60	60	60	60	60
	f	5,5	5,5	5,5	5,5	5,5	5,5
	g	8	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	83	88	95	99	99	105
	i	78	85	96	103	103	110
	k	26	27	27	34	34	34
	l	50	54	57	62	62	65
Borna para cond. Sección Transvers. (mm²) min.-máx.		1,5 —4	1,5 —4	1,5 —4	2,5 —10	2,5 —10	2,5 —10

Grupo de artículos : **1046**

voltages : 400V

rated current : 32A

pole : 5 pole

IP protection types : IP67

position of ground contact : 6h

packing unit : 0010

Peso : 297 g

Nº DE REF.

V	110V	230V	400V	500V	>50-500V	
Hz	50,60	50,60	50,60	50,60	100-300	300-500
Color código						
Amperios						
16 A	3	217A	218A	219A		
	4	220A	221A	222A	223A	224A
	5	226A	227A	228A		
32 A	3	229A	230A	231A		
	4	232A	233A	234A	235A	236A
	5	238A	239A	240A		