




N° de Ref. : 253

**Clavija AM-TOP**

carcasa de una pieza, prensaestopas roscado con estanqueidad, antitracción y protección contra deformaciones del cable

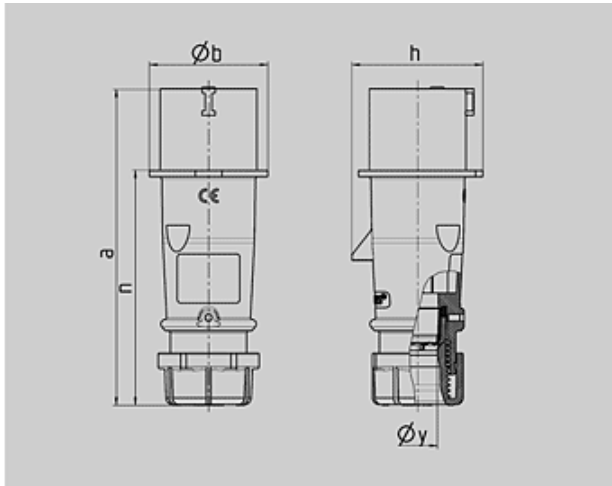

Plano	Amp.	16			32		
		2 MB 217 Polos			3	4	5
Dim. en mm	a	142	147	147	186	186	180
	b	53	59	67	70	70	77
	h	59	69,4	76	81	81	89,5
	n	105,2	110,5	110,5	141	141	135
	y	14,5	16	16	22	22	22
Borna para cond. Transvers. (mm <sup>2</sup> ) min.-máx.	Sección	1	1	1	2,5	2,5	2,5
		-2,5	-2,5	-2,5	-6	-6	-6

 Grupo de artículos : **2141**

voltages : 500V

rated current : 16A

pole : 4 pole







IP protection types : IP44

position of ground contact : 7h

packing unit : 0010

Peso : 146 g

N° DE REF.

V	<b>110V</b>	<b>230V</b>	<b>400V</b>	<b>500V</b>	<b>&gt;50-500V</b>	
Hz	50,60	50,60	50,60	50,60	100-300	300-500
Color código						
Amperios						
<b>16 A</b>	3	247	248	249	2168	2271
	4	250	251	252	<u>253</u>	254 255
	5	256	257	3	2014	2189 2243
<b>32 A</b>	3	259	260	261	2195	2341
	4	262	263	264	265	266 267
	5	268	269	4	2015	2244 2178