




N° de Ref. : 544

Prolongador AM-TOP

carcasa de una pieza, prensaestopas roscado con estanqueidad, antitracción y protección contra deformaciones del cable

16A4P 6H400V Kupplung AM-TOP IP67

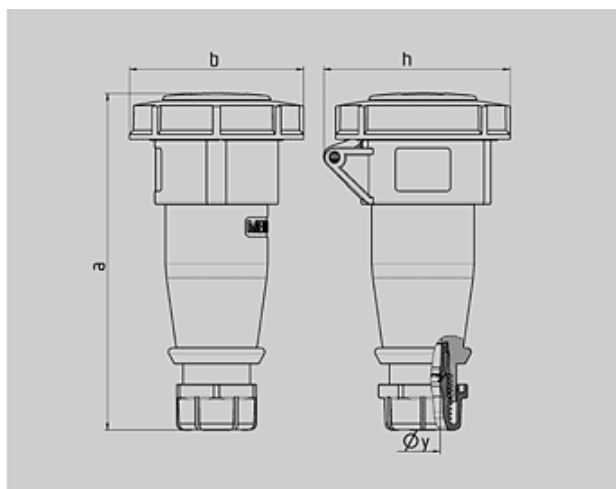

Plano 3 MB 62	Amp. Polos	16			32		
		3	4	5	3	4	5
Dim. en mm	a	146	166	172	212	212	213
	b	72	79	89	96	96	102
	h	80	88	95	98	98	105
	y	14,5	16	16	22	22	22
Borna para cond. Sección		1	1	1	2,5	2,5	2,5
Transvers. (mm²) min.-max.		—2,5	—2,5	—2,5	—6	—6	—6

Grupo de artículos :	3149
voltages :	400V
rated current :	16A
pole :	4 pole
IP protection types :	IP67
position of ground contact :	6h
packing unit :	0010
pilot contact (63A-125A) :	without pilot-contact
contact carriers :	standard
contact technique :	screw contact
Peso :	200 g

N° DE REF.		V	110V	230V	400V	500V	> 50-500V
	Hz		50,60	50,60	50,60	50,60	100-300 300-500
Color código							 
Amperios							
16 A	3	539	540	541			
	4	542	543	544	545	546	547
	5	548	549	550			
32 A	3	551	552	553			
	4	554	555	556	557	558	559
	5	560	561	562			