




Bestell-Nr. : 1492

Anbausteckdose

Neigung 20°

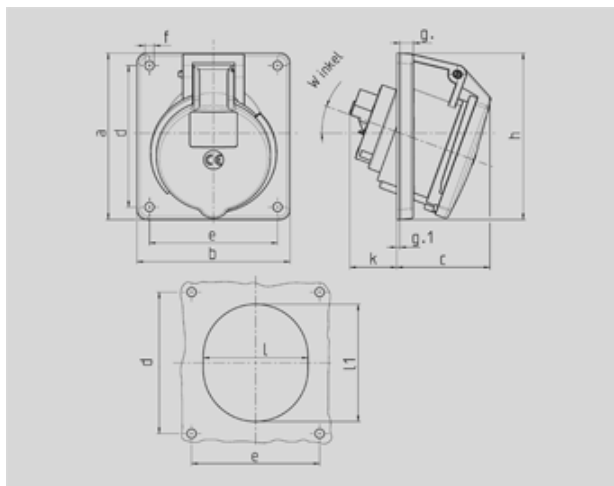

Zeichnung 1 MB 260	Amp. Pole	16			32		
		3	4	5	3	4	5
Maße in mm	a	73,5	100	100	100	100	100
	b	64	92	92	92	92	92
	c	50	59	58	62	62	61
	d	60	85	85	85	85	85
	e	52	77	77	77	77	77
	f	5,5	5,5	5,5	5,5	5,5	5,5
	g	7	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	79	100	100	103	103	106
	k	44	34	34	54	54	49
	l	52	55	65	67	67	72
	l1	60	63	72	82	82	85
	α	20°	20°	20°	20°	20°	20°
	Klemmen für Leiterquerschnitt von bis mm²	1,5 —4	1,5 —4	1,5 —4	2,5 —10	2,5 —10	2,5 —10

Artikel-Gruppe : 1044

Spannung : 230V

Stromstärke : 32A

Polzahl : 3 polig

Schutzart : IP 44

Uhrzeit : 6h

Verpackungseinheit : 0010

Gewicht : 250 g

BESTELLNUMMERN

		V	110V	230V	400V	500V	>50-500V	
		Hz	50,60	50,60	50,60	50,60	100-300	300-500
Kennfarbe								
Amp.								
16 A	3	1462	1463	1464		3186	3187	
	4	1465	1466	1467	1468	1469	1470	
	5	1471	1472	1473	3188	3189	3190	
32 A	3	1491	1492	1493		3201	3202	
	4	1494	1495	1496	1497	1486	1487	
	5	1498	1499	1500	3191	3192	3193	