


Base mural - N° de Ref. 102


- screw terminals
- internal fixing
- one cable entry at top and one blind entry (can be cut out) at the bottom
- 4p and 5p receptacles the enclosure can be turned 180°

Grado de protección IP 44
 Amperios 16A
 Polos 3p
 Voltios 400V
 Hertzios 50-60Hz
 Sentido horario 9h
 Contactos estándar
 Técnica de conexión bornas de tornillo

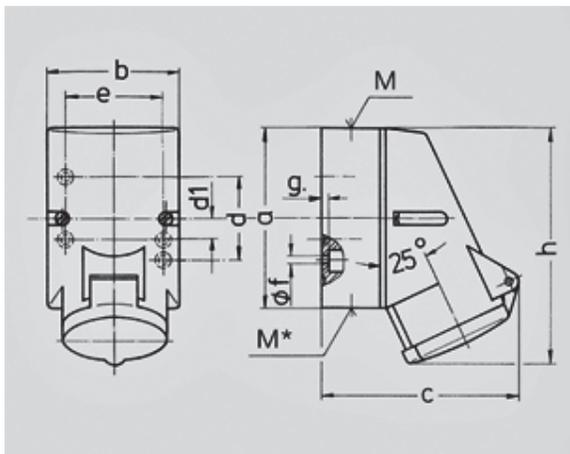

Plano	Amp.	16		
		Polos		
1 MB 209		3	4	5
Dim. en mm	a	87	100	100
	b	64	75	75
	c	99	110	113
	d	40	-	-
	d1	-	11	11
	e	50	59	59
	f	4,5	5	5
	g	4	4	4
	h	115	125	128
	M	20	20	20
	M*	20 entrada ciega para cortar		
Ø y [max]		15	15	15
Borna para cond. Sección		1,5	1,5	1,5
Transvers. (mm²) min.-max.		-4	-4	-4