


A SOLUTION FOR EVERY NEED

REF 1308A

- 1 row of 8 modules
- Inferior/Superior Pre-cut sides: 4 of Ø20mm of 4 of Ø25mm & 2 of Ø32mm
- Pre-cut sides: Ø2 à 32mm

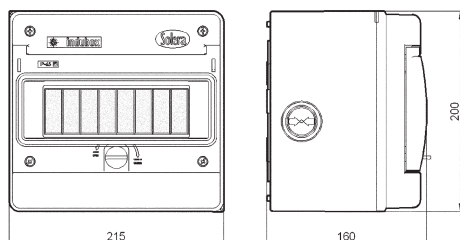


MEASURES (mm)

215 x 200 x 160

Technical characteristics

Directive 2006/95/CE	Glow-Wire temperature 650°C
Regulation EN-60 670	Ball pressure test 70°C
Directive 2002/95/CE (Rohs)	Dimensional stability [-25 +85]°C
IP 65 - IK08 - Class II	UV Resistance
RAL 7035	Halogen free

Characteristics

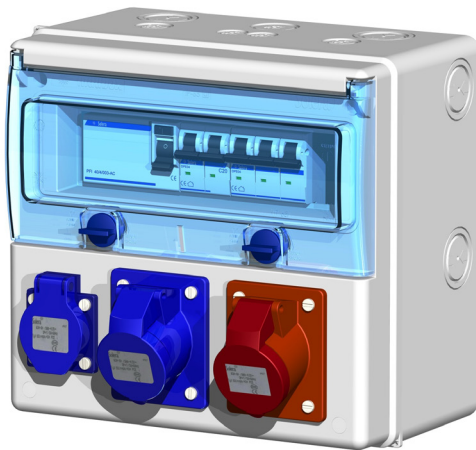

STRONG:

- IP65 - IK 08 - Class II
- UV Resistance
- Halogen free

FUNCTIONAL:

Wide space in order to pass the cable under DIN rail (45mm)

VERSATILE:

Great depth of 160 mm

LINKABLE:

Easy to connect with cable glands (M32 or M40)

Solera Solutions: The INDUBOX series offers one of the widest range in the market. Its *Robustness*, *Versatility* and *Design* make a product which is unique in the market, it has been designed to conquer the most unfavorable conditions.

INDUBOX Range




1312



1308P



1332P



1348P



821P

BIG INDUBOX

SMALL INDUBOX*

Ref.	Modules	Rows	Dimentiones (L x H x D)	Weight (kgs)	Windows
1303	3	1x3	85x155x100	0,3	0
1304	4	1x4	120x200x115	0,6	0
1306B	6	1x6	170x200x115	0,7	0
1308A	8	1x8	215x200x160	1,0	0
1308B	8	1x8	215x200x115	0,8	0
1311 A	11	1x11	270x250x160	1,3	0
1312	12	1x12	270x250x160	1,3	0
1308P	8	1x8	500x215x160	1,9	0
1308 PV1	8	1x8	500x215x160	1,9	1
1308 PV3	8	1x8	500x215x160	1,9	3
1311 P	11	1x11	500x270x160	2,2	0
1311 PV2	11	1x11	500x270x160	2,1	2
1311 PV4	11	1x11	500x270x160	2,1	4
1316 P	16	1x16	500x362x160	2,9	0
1316 PV3	16	1x16	500x362x160	2,7	3
1316 PV6	16	1x16	500x362x160	2,7	6
1332 P	32	2x16	500x362x160	3,2	0
1332 PV3	32	2x16	500x362x160	3,1	3
1332 PV6	32	2x16	500x362x160	3,1	6
1348 P	48	3x16	500x362x160	3,5	0
820 P	0	0	500x270x140	1,9	0
821 P	0	0	500x362x150	2,5	0

* Take away the P to request smooth walls, without pre-cut sides