




Nº de Ref. : 1466

Base semiempotrable

inclinación 20°

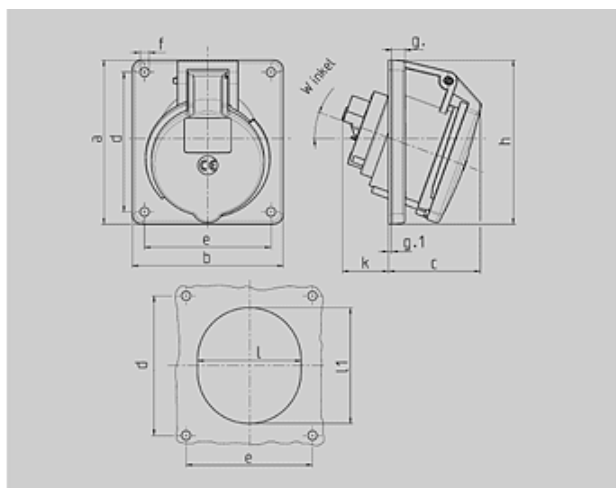

Plano 1 MB 260	Amp. Polos	16			32		
		3	4	5	3	4	5
Dim. en mm	a	73,5	100	100	100	100	100
	b	64	92	92	92	92	92
	c	52	58	58	62	62	62
	d	60	85	85	85	85	85
	e	52	77	77	77	77	77
	f	5,5	5,5	5,5	5,5	5,5	5,5
	g	7	8	8	8	8	8
	g.1	2	2	2	2	2	2
	h	79	100	100	103	103	107
	k	43	32	32	53	53	45
	l	52	55	65	67	67	72
	l1	60	63	72	82	82	85
	α	20°	20°	20°	20°	20°	20°
	Borna para cond. Sección Transvers. (mm²) min.-máx.	1,5 —4	1,5 —4	1,5 —4	2,5 —10	2,5 —10	2,5 —10

Grupo de artículos : **1044**

voltages : 230V

rated current : 16A

pole : 4 pole

IP protection types : IP44

position of ground contact : 9h

packing unit : 0010

Peso : 186 g

Nº DE REF.

V	110V	230V	400V	500V	>50-500V	
Hz	50,60	50,60	50,60	50,60	100-300	300-500
Color código						
Amperios						
16 A	3	1462	1463	1464	3186	3187
	4	1465	1466	1467	1468	1470
	5	1471	1472	1473	3188	3190
32 A	3	1491	1492	1493	3201	3202
	4	1494	1495	1496	1497	1487
	5	1498	1499	1500	3191	3193