



# A SOLUTION FOR EVERY NEED

## REF 1303

- 1 Row of 3 modules
- Inferior/Superior Pre-cut sides: 2 of Ø32mm




Measurements (mm)  
85 x 155 x 100

### Technical characteristics

|                             |                                   |
|-----------------------------|-----------------------------------|
| Directive 2006/95/CE        | Glow-Wire temperature 650°C       |
| Regulation EN-60 670        | Ball preasure test 70°C           |
| Directive 2002/95/CE (Rohs) | Dimensional stability [-25 +85]°C |
| IP 65 - IK08 - Class II     | UV Resistance                     |
| RAL 7035                    | Halogen free                      |

## Characteristics

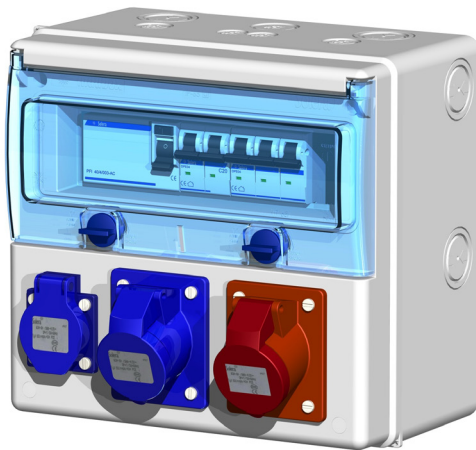

### STRONG:

- IP65 - IK 08 - Class II
- UV Resistance
- Halogen free

### FUNCTIONAL:

Wide space in order to pass the cable under DIN rail (45mm)

### VERSATILE:

Great depth of 160 mm

### LINKABLE:

Easy to connect with cable glands (M32 or M40)

**Solera Solutions:** The INDUBOX series offers one of the widest range in the market. Its *Robustness*, *Versatility* and *Design* make a product which is unique in the market, it has been designed to conquer the most unfavorable conditions.

## INDUBOX Range




1312



1308P



1332P



1348P



821P

**BIG  
INDUBOX**

**SMALL INDUBOX\***

| Ref.     | Modules | Rows | Dimentiones (L x H x D) | Weight (kgs) | Windows |
|----------|---------|------|-------------------------|--------------|---------|
| 1303     | 3       | 1x3  | 85x155x100              | 0,3          | 0       |
| 1304     | 4       | 1x4  | 120x200x115             | 0,6          | 0       |
| 1306B    | 6       | 1x6  | 170x200x115             | 0,7          | 0       |
| 1308A    | 8       | 1x8  | 215x200x160             | 1,0          | 0       |
| 1308B    | 8       | 1x8  | 215x200x115             | 0,8          | 0       |
| 1311 A   | 11      | 1x11 | 270x250x160             | 1,3          | 0       |
| 1312     | 12      | 1x12 | 270x250x160             | 1,3          | 0       |
| 1308P    | 8       | 1x8  | 500x215x160             | 1,9          | 0       |
| 1308 PV1 | 8       | 1x8  | 500x215x160             | 1,9          | 1       |
| 1308 PV3 | 8       | 1x8  | 500x215x160             | 1,9          | 3       |
| 1311 P   | 11      | 1x11 | 500x270x160             | 2,2          | 0       |
| 1311 PV2 | 11      | 1x11 | 500x270x160             | 2,1          | 2       |
| 1311 PV4 | 11      | 1x11 | 500x270x160             | 2,1          | 4       |
| 1316 P   | 16      | 1x16 | 500x362x160             | 2,9          | 0       |
| 1316 PV3 | 16      | 1x16 | 500x362x160             | 2,7          | 3       |
| 1316 PV6 | 16      | 1x16 | 500x362x160             | 2,7          | 6       |
| 1332 P   | 32      | 2x16 | 500x362x160             | 3,2          | 0       |
| 1332 PV3 | 32      | 2x16 | 500x362x160             | 3,1          | 3       |
| 1332 PV6 | 32      | 2x16 | 500x362x160             | 3,1          | 6       |
| 1348 P   | 48      | 3x16 | 500x362x160             | 3,5          | 0       |
| 820 P    | 0       | 0    | 500x270x140             | 1,9          | 0       |
| 821 P    | 0       | 0    | 500x362x150             | 2,5          | 0       |

\* Take away the P to request smooth walls, without pre-cut sides