




N° de Ref. : 248

Clavija AM-TOP

carcasa de una pieza, prensaestopas roscado con estanqueidad, antitracción y protección contra deformaciones del cable

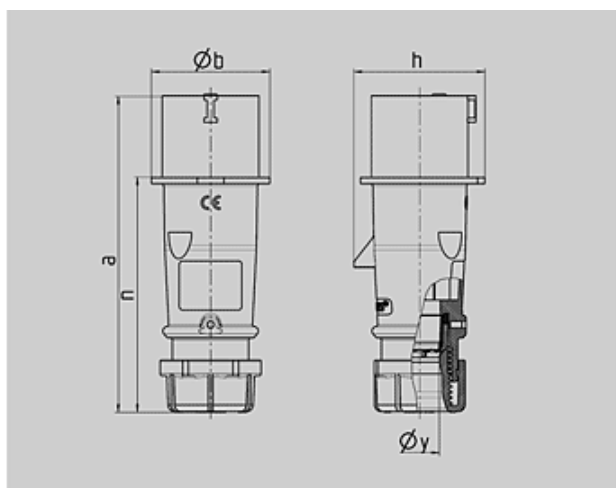

Plano 2 MB 217	Amp. Polos	16			32		
		3	4	5	3	4	5
Dim. en mm	a	142	147	147	186	186	180
	b	53	59	67	70	70	77
	h	59	69,4	76	81	81	89,5
	n	105,2	110,5	110,5	141	141	135
	y	14,5	16	16	22	22	22
Borna para cond. Sección		1	1	1	2,5	2,5	2,5
Transvers. (mm²) min.-máx.		—2,5	—2,5	—2,5	—6	—6	—6

Grupo de artículos : **2141**

voltages : 230V

rated current : 16A

pole : 3 pole

IP protection types : IP44

position of ground contact : 6h

packing unit : 0010

Peso : 113 g

N° DE REF.

	V	110V	230V	400V	500V	>50-500V	
	Hz	50,60	50,60	50,60	50,60	100-300	300-500
Color código							
Amperios							
16 A	3	247	248	249		2168	2271
	4	250	251	252	253	254	255
	5	256	257	3	2014	2189	2243
32 A	3	259	260	261		2195	2341
	4	262	263	264	265	266	267
	5	268	269	4	2015	2244	2178