




Nº de Ref. : 1467

## Base semiempotrable

inclinación 20°

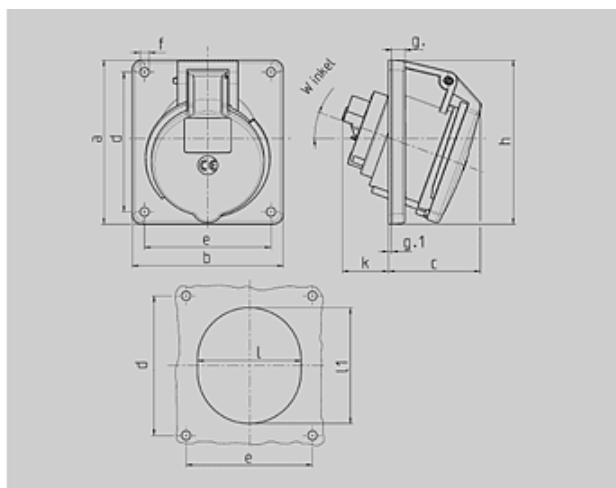

| Plano<br>1 MB 260          | Amp.<br>Polos | 16   |     |     | 32  |     |     |
|----------------------------|---------------|------|-----|-----|-----|-----|-----|
|                            |               | 3    | 4   | 5   | 3   | 4   | 5   |
| Dim. en mm                 | a             | 73,5 | 100 | 100 | 100 | 100 | 100 |
|                            | b             | 64   | 92  | 92  | 92  | 92  | 92  |
|                            | c             | 52   | 58  | 58  | 62  | 62  | 62  |
|                            | d             | 60   | 85  | 85  | 85  | 85  | 85  |
|                            | e             | 52   | 77  | 77  | 77  | 77  | 77  |
|                            | f             | 5,5  | 5,5 | 5,5 | 5,5 | 5,5 | 5,5 |
|                            | g             | 7    | 8   | 8   | 8   | 8   | 8   |
|                            | g.1           | 2    | 2   | 2   | 2   | 2   | 2   |
|                            | h             | 79   | 100 | 100 | 103 | 103 | 107 |
|                            | k             | 43   | 32  | 32  | 53  | 53  | 45  |
|                            | l             | 52   | 55  | 65  | 67  | 67  | 72  |
|                            | l1            | 60   | 63  | 72  | 82  | 82  | 85  |
| Borna para cond. Sección   |               | 1,5  | 1,5 | 1,5 | 2,5 | 2,5 | 2,5 |
| Transvers. (mm²) min.-máx. |               | —4   | —4  | —4  | —10 | —10 | —10 |

Grupo de artículos : **1044**

voltages : 400V

rated current : 16A

pole : 4 pole

IP protection types : IP44

position of ground contact : 6h

packing unit : 0010

Peso : 186 g

Nº DE REF.

|              | V | <b>110V</b>                                                                         | <b>230V</b>                                                                         | <b>400V</b>                                                                         | <b>500V</b>                                                                         | <b>&gt;50-500V</b>                                                                  |                                                                                     |
|--------------|---|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|              |   | 50,60                                                                               | 50,60                                                                               | 50,60                                                                               | 50,60                                                                               | 100-300                                                                             | 300-500                                                                             |
| Color código |   |  |  |  |  |  |  |
| Amperios     |   |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| <b>16 A</b>  | 3 | 1462                                                                                | 1463                                                                                | 1464                                                                                |                                                                                     | 3186                                                                                | 3187                                                                                |
|              | 4 | 1465                                                                                | 1466                                                                                | 1467                                                                                | 1468                                                                                | 1469                                                                                | 1470                                                                                |
|              | 5 | 1471                                                                                | 1472                                                                                | 1473                                                                                | 3188                                                                                | 3189                                                                                | 3190                                                                                |
| <b>32 A</b>  | 3 | 1491                                                                                | 1492                                                                                | 1493                                                                                |                                                                                     | 3201                                                                                | 3202                                                                                |
|              | 4 | 1494                                                                                | 1495                                                                                | 1496                                                                                | 1497                                                                                | 1486                                                                                | 1487                                                                                |
|              | 5 | 1498                                                                                | 1499                                                                                | 1500                                                                                | 3191                                                                                | 3192                                                                                | 3193                                                                                |